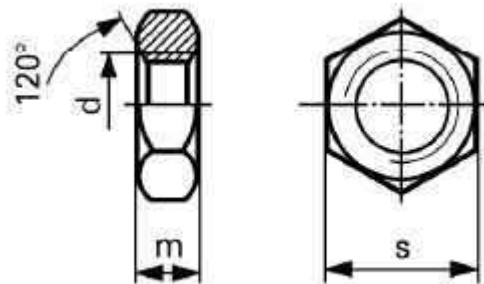


Nakrętka sześciokątna niska

PN-86/M-82153
DIN 439
ISO 4035
DIN 936
ISO 7038


d		M 1,6	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8
m	min.	0,75	0,95	1,35	1,55	1,95	2,45	2,9	3,7
	max.	1	1,2	1,6	1,8	2,2	2,7	3,2	4
s		3,2	4	5	5,5	7	8	10	13

d		M 10	M 12	M 16	M 20	M 24	M 30	M 36	M 42
m	min.	4,7	4,6	7,42	9,1	10,9	13,9	16,9	19,7
	max.	5	5,7	8	10	12	15	18	21
s		16	18	24	30	36	46	55	65

d		M 48	M 56	M 64
m	min.	22,7	26,7	30,4
	max.	24	28	32
s		75	85	95